


8	7	6	5	4	3	2	1	
				REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
				X	NEW	Alice	BG YANG	2014.07.30

**Technical requirement 技术参数：**

- Electrical Characteristics Test 电气性能检验
  - Products 100% for electrical test. 成品100%电性测试。
  - Insulation resistance: Less than 100MΩ of 500V DC /0.4S.  
绝缘阻抗: 大于或等于100MΩ 500V DC/0.4S
  - Dielectric strength 耐电压
    - Between two conductors  $2500^{+200}_0$  V AC for 1.0s Trip-current 1.0mA max.  
导体与导体之间  $2500^{+200}_0$  V AC /1秒, 漏电流 1.0mA(max)。
    - Between conductor and body  $6000^{+200}_0$  V AC for 3.0s - Trip current 1.0mA max.  
导体与本体之间  $6000^{+200}_0$  V AC /3秒, 漏电流 1.0mA(max)。
- Mechanical Characteristics Test 机械性能检验
  - Withdrawal force 拔出力
    - For checking each PIN independently from the standard-gauge below 1.5N(Min) Keep for 3S or more.  
标准量规对连接器插孔单PIN保持力为最小1.5N保持3秒以上。
    - For checking Integral withdrawal force 50N(Max) from maximum standard gauge. 标准量规(最大值)检查整体拔出力 50N(最大)。
- Finished product conditions 成品状态
  - The attachment plug front show the test mark of "T".  
插头主视面须有测试标志 "T"。
  - The dimension with "▽" must be control and inspected importantly.  
带 "▽" 尺寸需重点管控和检验。
  - material and product comply with Doc No. "QW-Q-043" 《material- and product- of restricted substance control specification.  
物料及成品必须符合 QW-Q-043 《材料与成品限用物质管理规范》。
- The standards for the products.: 产品标准：
  - The cord shall comply with IEC60227. 线材须符合 IEC60227.
  - The molded plug shall comply with BS 1363. 插头须符合 BS 1363.
  - The molded connector shall comply with IEC60320. 连接器须符合 IEC60320.

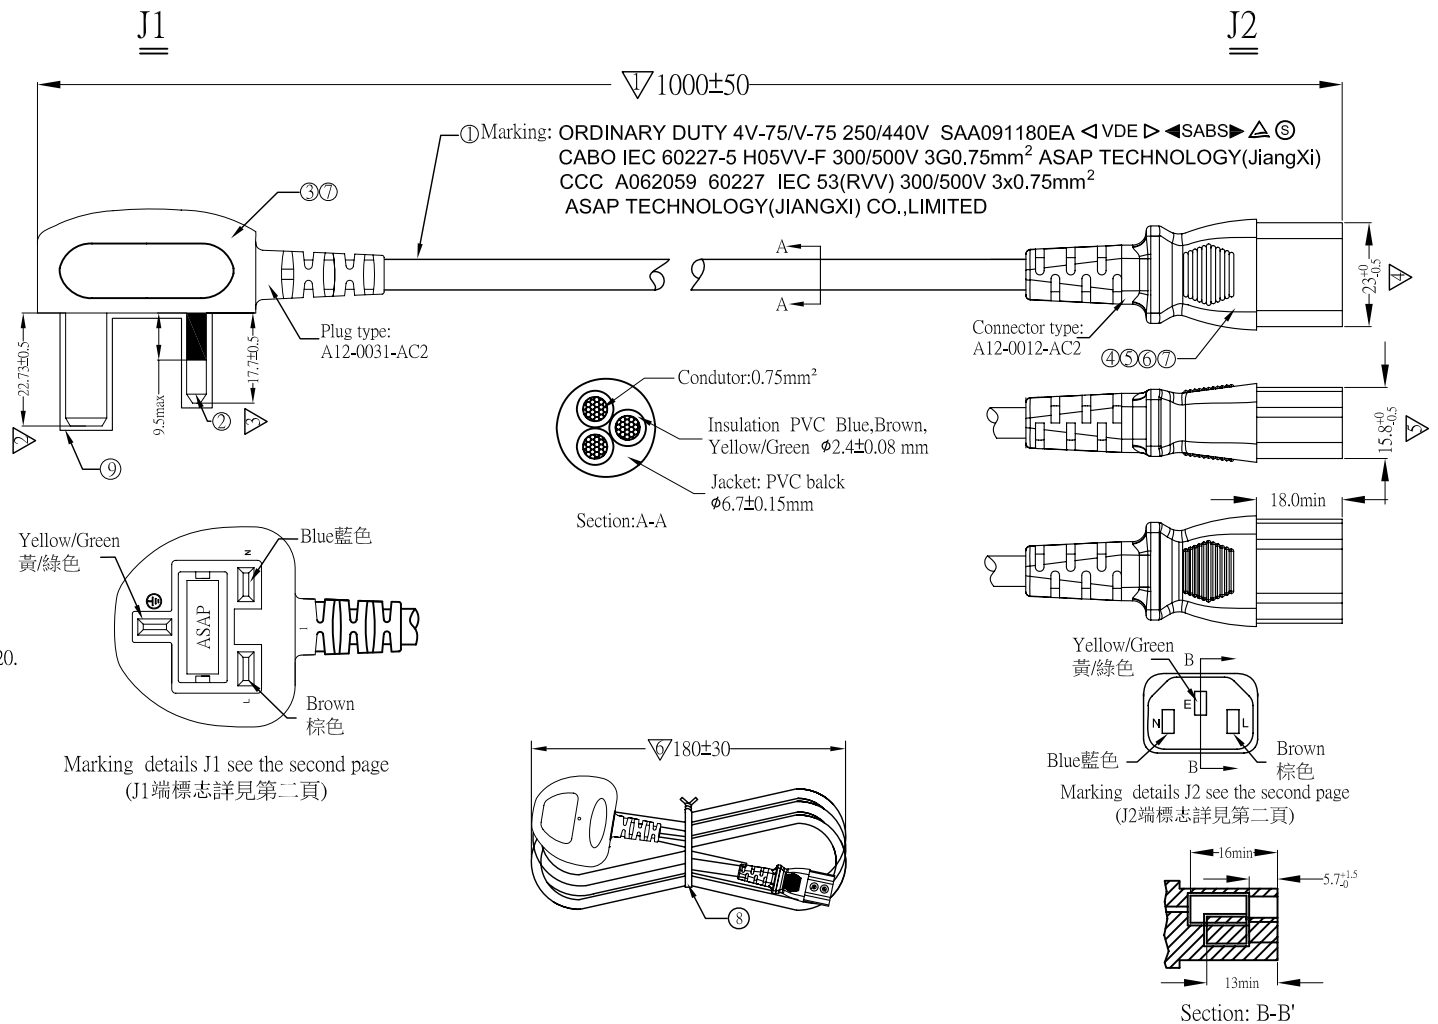

wiring method 接线方式：


J1	cord	J2
E	Yellow/Green 黄/绿色	E
L	Brown 棕色	L
N	Blue 蓝色	N

Marking details J1 see the second page (J1端标志详见第二页)


Marking details J2 see the second page (J2端标志详见第二页)

⑨	SLEEVE	Protecting of plug, PE, White	pcs	1	X.±	X.°±	UNITS	P/N:42 0558			
⑧	TIE	Black PE tie meeting RoHS	pcs	1	.X±	.X°±					mm
⑦	PVC PELLET	55P black PVC pellets meeting RoHS, UL94 V-0.	g		.XX±	.XX°±	MATL	PART NO:	TITLE:		
⑥	TERMINAL	U type contact terminal with wing for C13 connector. Copper	pcs	3	.XXX±	.XXX°±		L8CAC009-DT-R	UK 3P To C13 L1.0m black		
⑤	HOUSING	Down cover of C13, PBT material, white	pcs	1			FINISH	APPD:	DWG NO:		
④	HOUSING	Upper cover of C13, PBT material, white	pcs	1				杨保根	L8CAC009-DT-R		
③	FUSE	5A fuse in line with BS 1362	pcs	1			Q'TY	CHKD:			
②	INSERT	UK fuse plug insert with grounding, black	pcs	1				欧阳光仁			
①	POWER CORD	H05VV-F 3x0.75mm <sup>2</sup> Φ6.7±0.15mm black	mm	NA			DR:	Alice			
ITEM	NAME	DESCRIPTION	UNIT	Q'TY						SCALE	SHEET
8	7	6	5	4	3	2			NONE	1/2	X


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ASAP TECHNOLOGY (JIANGXI) CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ASAP TECHNOLOGY (JIANGXI) CO., LIMITED.

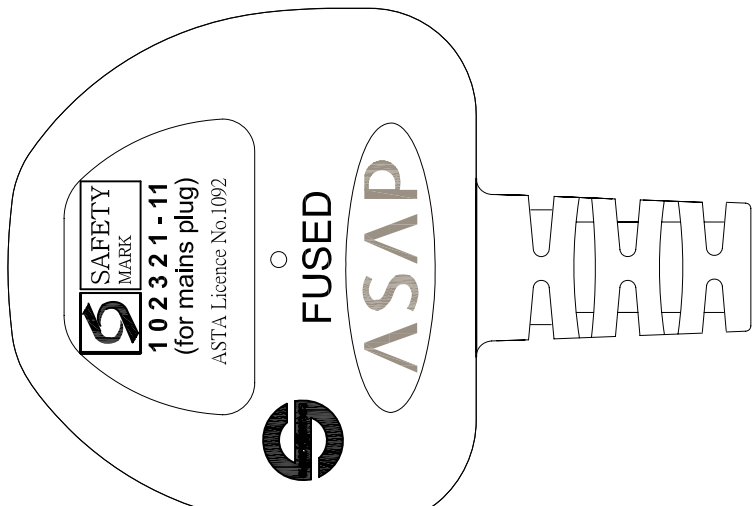



年份,月份随生产时间变化而变化  
The date marking change as the actual macking date

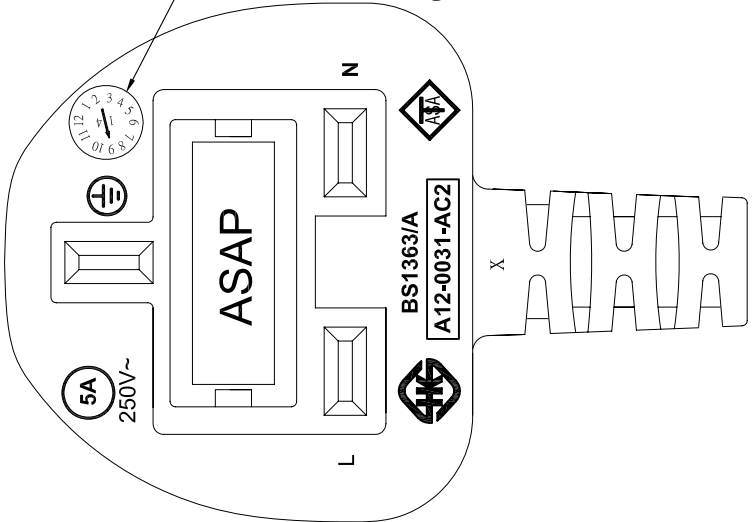

J1 Marking  
J1端標誌

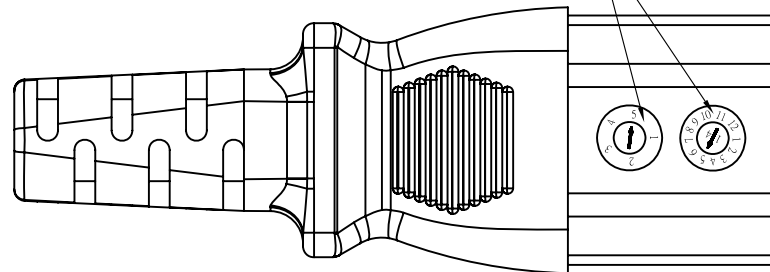

年,月份,周期字块随生产  
时间变化而变化  
The date marking change  
as the actual macking date

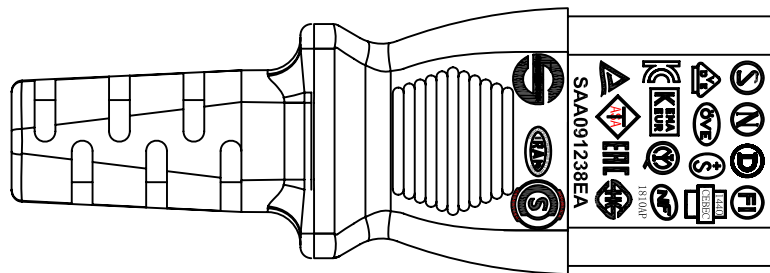

J2Marking  
J2端標誌

X.±	X.°±	UNITS mm	P/N:42 0558		
.X±	.X°±				
.XX±	.XX°±	MATL	PART NO: L8CAC009-DT-R	TITLE: UK 3P To C13 L1.0m black	
.XXX±	.XXX°±		FINISH	APPD: 杨保根	DWG NO: L8CAC009-DT-R
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ASAP TECHNOLOGY(JIANGXI)CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ASAP TECHNOLOGY(JIANGXI)CO., LIMITED.		Q'TY	CHKD: 欧阳光仁	 SCALE NONE	
			DR: Alice		
				REV. X	