

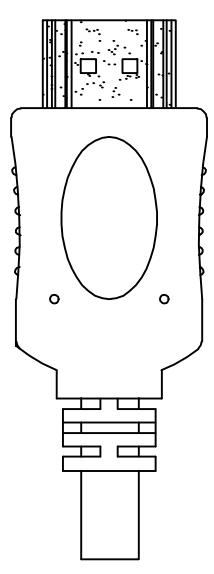


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

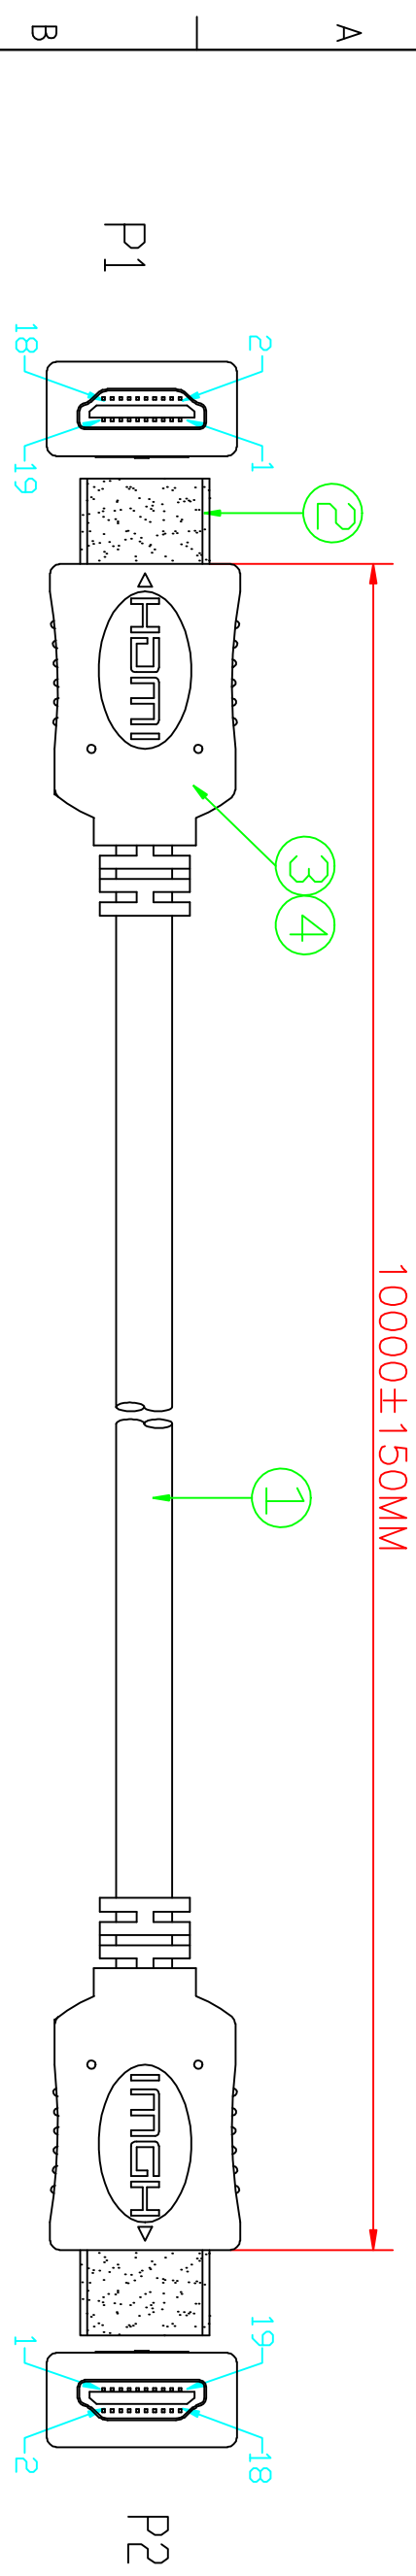

PIN OUT

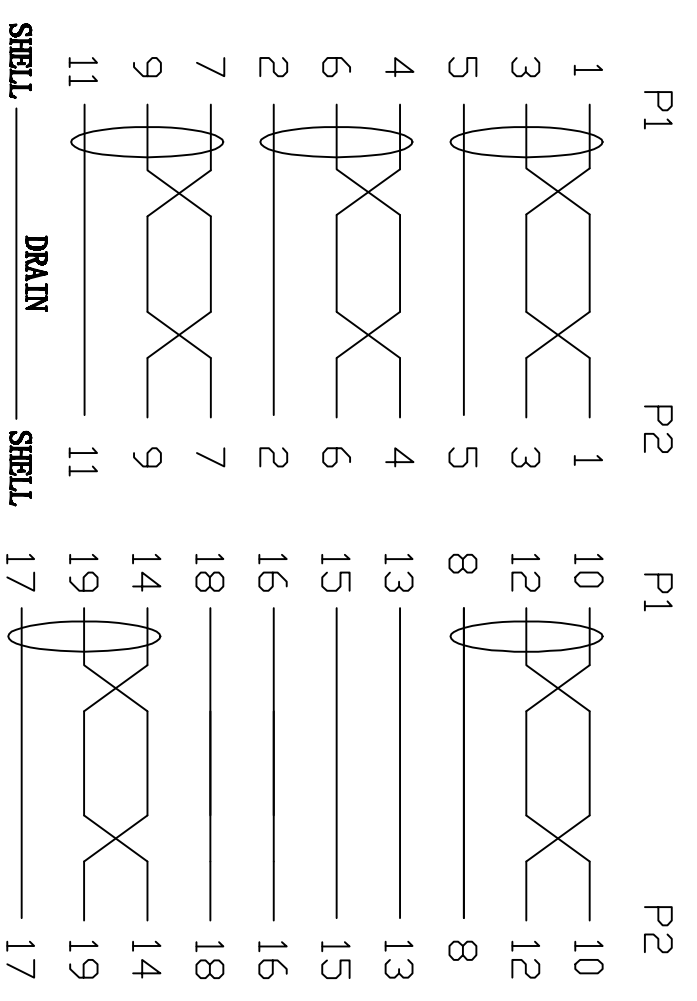

- NOTES:
- 1:100% short,open and miss wire test.
 - 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)
 - 3:Use testing:1080P

④	OUTER MOLDED	WHITE 45P PVC	0.024	KG
③	INNER MOLDED	LDPE	0.024	KG
②	CONNECTOR	HDMI 19PIN MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	2	PCS
①	CABLE	(1P*28#+D+AL+MYLAR)*5C+4C*28#+ADB JACKET:BLACK PVC,OD:7.3±0.15 MARKING:High Speed HDMI® Cable with Ethernet	10000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date	File name
ANGLE:	UNIT:MM	SEP 13.2013	HDMI 1.4 10M
		HDMI 1.4 AM-AM 28AWG	Date
		32 3635	SEP 13.2013
		1	Scale
		1	FREE
		1	Article No./Reference
		1	Scale
		1	FREE

