

| REV. | DESCRIPTION | DESIGN | APPROVAL | DATE |
|------|-------------|--------|----------|------------|
| X | NEW | Betty | BG YANG | 2014.12.23 |

Technical requirement 技术参数:

1. Electrical Characteristics Test 电气性能检验

1.1 Products 100% for electrical test. 成品100%电性测试.

1.2 Insulation resistance: No less than 100MΩ of 500V DC/0.4S.
绝缘阻抗: 大于或等于 100MΩ 500V DC/0.4S.

1.3 Dielectric strength 耐电压

1.3.1 Between two conductors 2500_{-0}^{+200} V AC for 1.0s Trip-current 1.0mA max.

导体与导体之间 2500_{-0}^{+200} V AC /1秒,漏电流1.0mA(max).

1.3.2 Between conductor and body 6000_{-0}^{+200} V AC for 3.0s - Trip current 1.0mA max.

导体与本体之间 6000_{-0}^{+200} V AC /3秒,漏电流1.0mA(max).

2. Mechanical Characteristics Test 机械性能检验

2.1. Withdrawal force 拔出力

2.1.1 For checking each PIN independently from the standard-gauge below 1.5N(Min) Keep for 3S or more.

标准量规对连接器插孔单PIN保持力为最小1.5N保持3秒以上.

2.1.2 For checking Integral withdrawal force 50N(Max) from maximum standard gauge. 标准量规(最大值)检查整体拔出力 50N(最大).

3. Finished product conditions 成品状态

3.1 The attachment plug front show the test mark of "T".

插头主视面须有测试标志"T".

3.2 The dimension with "▽" must be control and inspected importantly.
带"▽"尺寸需重点管控和检验.

4. Standards 标准

4.1 The cord shall comply with IEC60227. 线材须符合IEC60227.

4.2 The molded plug shall comply with BS 1363. 插头须符合BS 1363.

4.3 The molded connector shall comply with IEC60320. 连接器须符合IEC60320.





5. Environmental requirement 环保要求

5.1 Material and product comply with Doc No. "QW-Q-043" 《material-and product-of restricted substance control specification.



物料及成品必须符合QW-Q-043《材料与成品限用物质管理规范》.

Wiring method 接线方式:

| | | |
|----|-------------------|----|
| J1 | cord | J2 |
| E | Yellow/Green 黄/绿色 | E |
| L | Brown 棕色 | L |
| N | Blue 蓝色 | N |

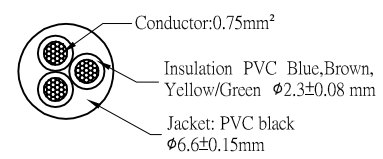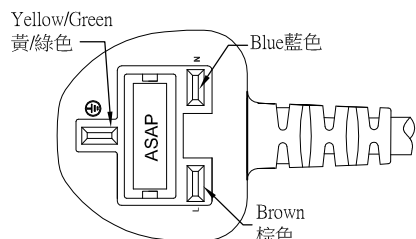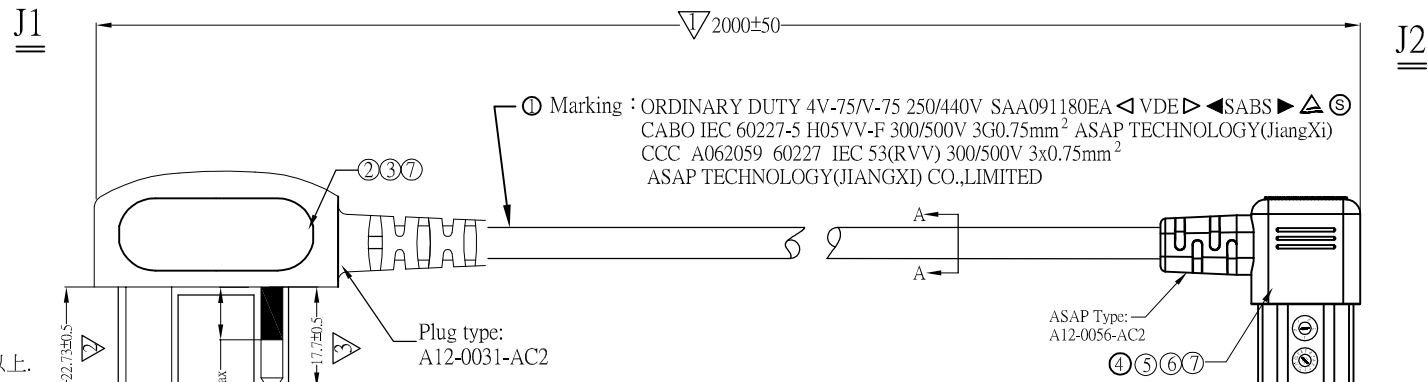

Marking details J1 see the second page (J1端标志详见第二页)



Marking details J2 see the second page (J2端标志详见第二页)



| ITEM | NAME | DESCRIPTION | Q'TY | UNIT |
|------|------------|---|------|------|
| ⑨ | SLEEVE | Protecting of plug, White | PCS | 1 |
| ⑧ | TIE | BLACK PE tie hanking cord and meeting RoHS. | PCS | 1 |
| ⑦ | PLASITC | 55P BLACK PVC pellets meeting RoHS and UL94 V-0. | PCS | 1 |
| ⑥ | TERMINAL | U type contact terminal with wing for C13 connector, copper | PCS | 3 |
| ⑤ | HOUSING | Down cover of C13, PBT material, white | PCS | 1 |
| ④ | HOUSING | Upper cover of C13, PBT material, white | PCS | 1 |
| ③ | FUSE | 5A fuse in line with BS 1362 | PCS | 1 |
| ② | INSERT | UK fuse plug insert with grounding, black | PCS | 1 |
| ① | POWER CORD | H05VV-F 3x0.75mm² Φ6.6±0.15mm Black | MM | 1 |

| X.± | X.°± |
|-------|--------|
| .X± | .X°± |
| .XX± | .XX°± |
| .XXX± | .XXX°± |
| UNITS | mm |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT

P/N:42 0544

| | |
|---------------------------|--|
| PART NO: L8CAC025-QT-N | TITLE: UK 3P To C13 90° L2.0m Black |
| APPD: Baogen Yang | DWG NO: ACRDN14120031 |
| CHKD: Guangren Ouyang | SCALE SHEET REV. NONE 1/2 X |
| DRAW: Betty Zou | |

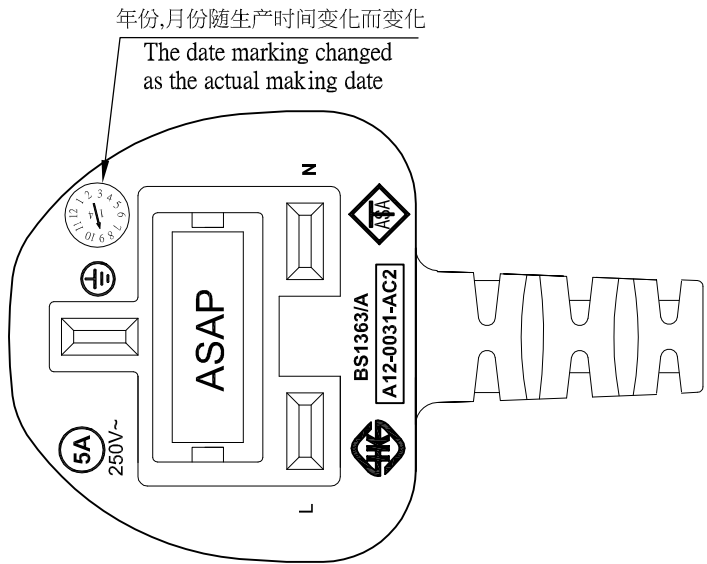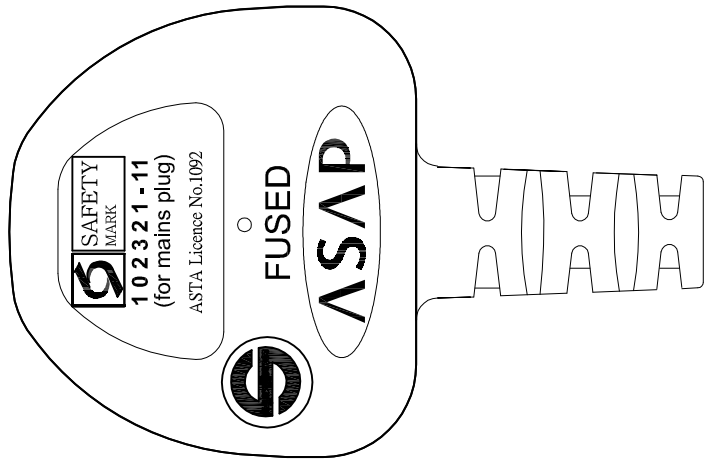

J1 Marking
J1端標誌

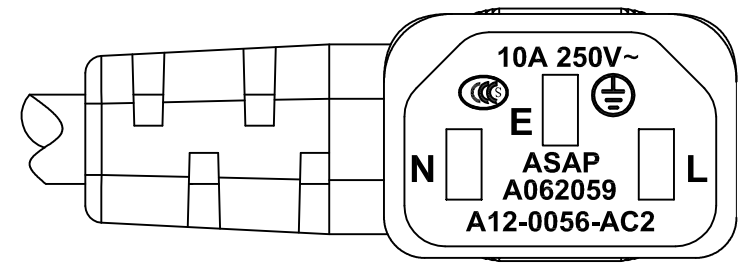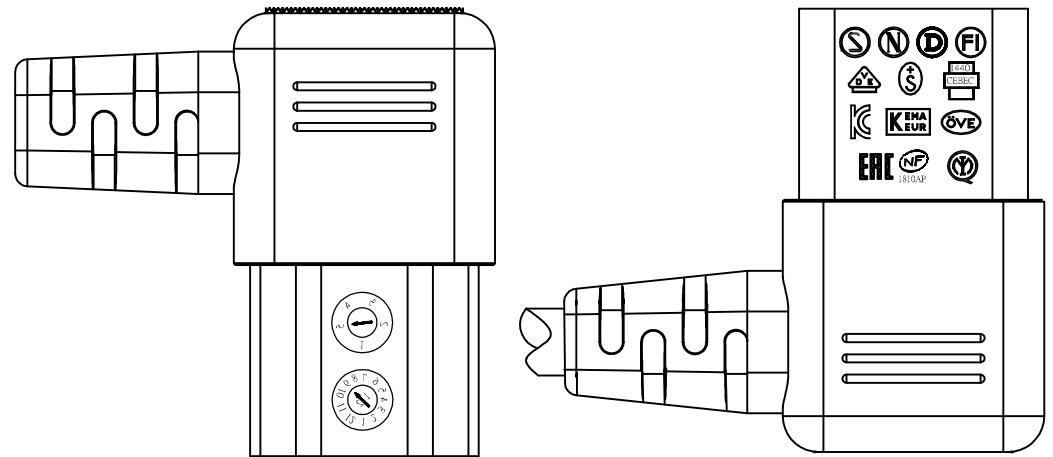

J2 Marking
J2端標誌

| | |
|-------|--------|
| X.± | X.°± |
| .X± | .X°± |
| .XX± | .XX°± |
| .XXX± | .XXX°± |
| UNITS | mm |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT

| | | | | | | | | |
|---------------------------|-------|---|-------|-------|------|------|-----|---|
| <h1>P/N:42 0544</h1> | | | | | | | | |
| PART NO: L8CAC025-QT-N | | TITLE: UK 3P To C13 90° L2.0m Black | | | | | | |
| APPD: Baogen Yang | | DWG NO: ACRDN14120031 | | | | | | |
| CHKD: Guangren Ouyang | | <table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>NONE</td> <td>2/2</td> <td>X</td> </tr> </table> | SCALE | SHEET | REV. | NONE | 2/2 | X |
| SCALE | SHEET | | REV. | | | | | |
| NONE | 2/2 | X | | | | | | |
| DRAW: Betty Zou | | | | | | | | |

